


FLOOR ASSEMBLY F 24
Result: STC-50*
 (Tested in accordance with ASTM E90-02)

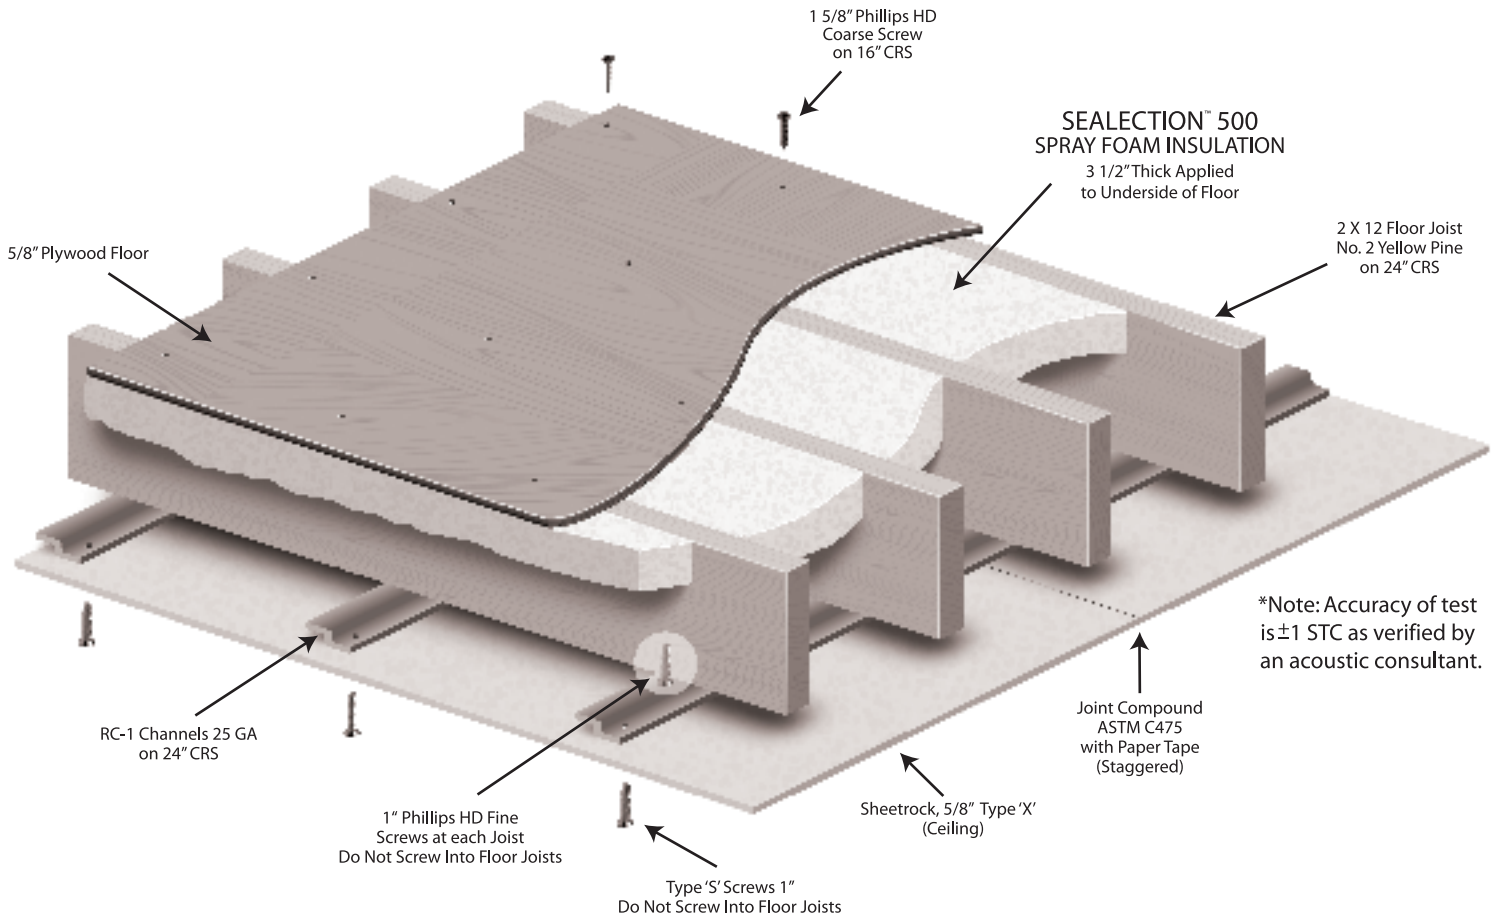

Note: The STC rating specified above is only valid for Sealection™ 500 spray foam insulation manufactured by Demilec® USA and applied by an Authorized Contractor.

Spray Foam Insulation Properties
0.47 - 0.5 LBS/FT ³
Tensile Strength 5.6 LBS/IN ²
Closed Cell Content 4%
Potential Heat of Combustion 8600 BTU/LB Maximum